


ELECTRIC TUBE CLEANERS: ('BPC-4-DUO' SERIES)



TUBE TOOLS

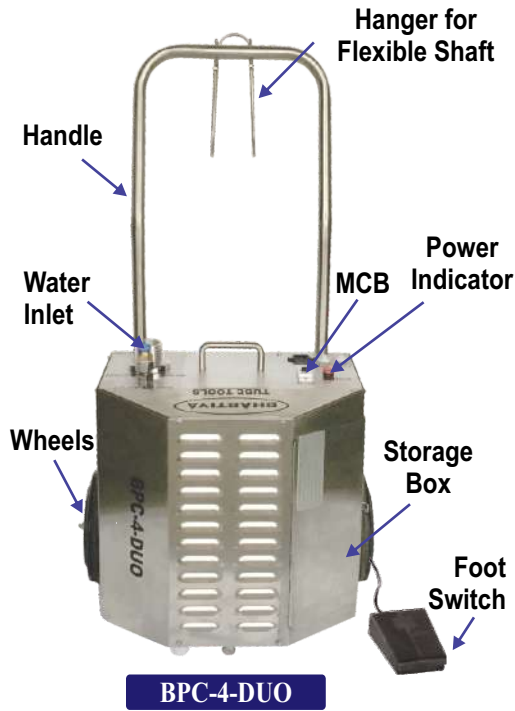

In order to clean internally enhanced tubes of chiller efficiently, we introduced new series of electrically operated chiller tube cleaner machine with bi directional foot switch & stainless steel mobile trolley. All our foot switches are air operated.

2 direction foot switch is optional.

- All units are available with following specifications :
- 115 v 60 Hz, 115 v 50 Hz - 9 Amps
- 220 v 60 Hz, 220 v 50 Hz - 4.5 Amps
- While ordering, please mention electric specifications.

Model No.	Motor		Tube ID		Speed
	HP	KW	INCH	MM	RPM
BPC-4-DUO	1.0	0.75	1/4 -1	6.4-25.40	1440

FLEXIBLE SHAFTS:

For BPC-2 & BPC-3, Flexible Shaft with stainless steel inner core can be supplied if specified by client.

While ordering flexible shafts and accessories, each item should be ordered for specific tube / pipes size or size range.

Stainless steel inner core ensures our shafts have longest life, resistance to corrosion,

To order flexible shaft (s) determine tube I.d. & Length of longest tube (s). Order flexible shaft(s) to correspond with tube I. D.(s), & length. Please ask for special or longer length.



Tube ID range		Flexible Shaft Model No.	Flexible shaft Length		Nylon Casing O.D.		Inner Core O.D.		Tool End Thread
MM	INCH		FEET	MTRS.	INCH	MM	INCH	MM	
6.4-9.5	1/4-3/8	NFSC-701-12	12	3.7	1/4	6.4	1/8	3.2	8-32 F
		NFSC-701-25	25	7.6					
11.1-12.7	7/16-1/2	NFSC-702-12	12	3.7	3/8	9.5	1/4	6.4	1/4-28 F
		NFSC-702-17	17	5.2					
		NFSC-702-25	25	7.6					
		NFSC-702-35	35	10.7					
		NFSC-702-45	45	13.7					
14.3-25.4	9/16-1	NFSC-703-12	12	3.7	1/2	12.7	5/16	7.9	1/4-28 F
		NFSC-703-17	17	5.2					
		NFSC-703-25	25	7.6					
		NFSC-703-35	35	10.7					
		NFSC-703-45	45	13.7					
		NFSC-703-60	60	18.3					
22.1-38.1	7/8-1.1/2	NFSC-705-12	12	3.7	3/4	19.1	1/2	12.7	1/2-12 F
		NFSC-705-25	25	7.6					
		NFSC-705-35	35	10.7					
		NFSC-705-45	45	13.7					