


# POLY-WASH<sup>®</sup>

## SYNTHETIC FILTER TECHNICAL DATA

PART NO	STD SIZE IN INCHES	INITIAL RESISTANCE IN W.G.	FINAL RESISTANCE IN W.G.	TYPE
DSWF19-1620	16x20x1	0.18	1.0	PANEL
DSWF19-2020	20x20x1	0.18	1.0	PANEL
DSWF19-2424	24x24x1	0.18	1.0	PANEL
DSWF20-1620	16x20x2	0.27	1.0	PANEL
DSWF20-2020	20x20x2	0.27	1.0	PANEL
DSWF20-2424	24x24x2	0.27	1.0	PANEL
DSTV21-1620	16x20x1	0.18	1.0	V-type
DSTV21-2020	20x20x1	0.18	1.0	V-type
DSTV21-2424	24x24x1	0.18	1.0	V-type
DSTV22-1620	16x20x2	0.18	1.0	V-type
DSTV22-2020	20x20x2	0.18	1.0	V-type
DSTV22-2424	24x24x2	0.18	1.0	V-type
DSTV23-1620	16x20x3	0.18	1.0	V-type
DSTV23-2020	20x20x3	0.18	1.0	V-type
DSTV23-2424	24x24x3	0.18	1.0	V-type
DSTV24-1620	16x20x4	0.18	1.0	V-type
DSTV24-2020	20x20x4	0.18	1.0	V-type
DSTV24-2424	24x24x4	0.18	1.0	V-type

### PERFORMANCE CURVE

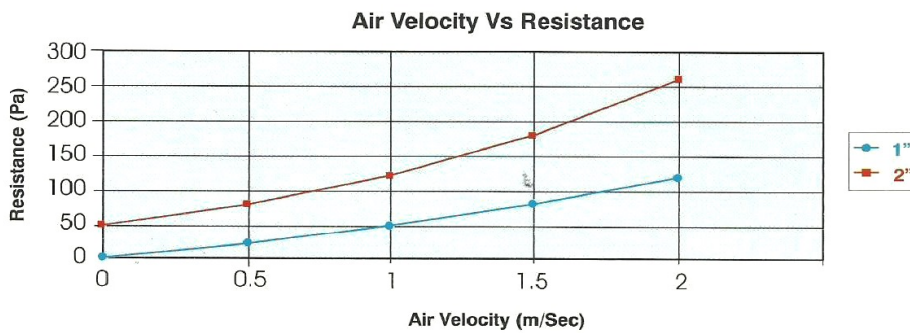

\* Arrestance Efficiency: 85-95%

\*\* Actual height and width are 5/8" less than nominal sizes.



\*\*\* Non-standard sizes are available upon request.

# POLY-WASH<sup>®</sup>

## SYNTHETIC FILTERS

### APPLICATION

POLY-WASH is used in industrial and commercial buildings where more dust accumulation is required.

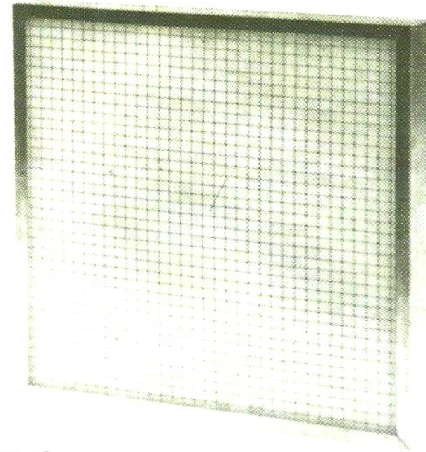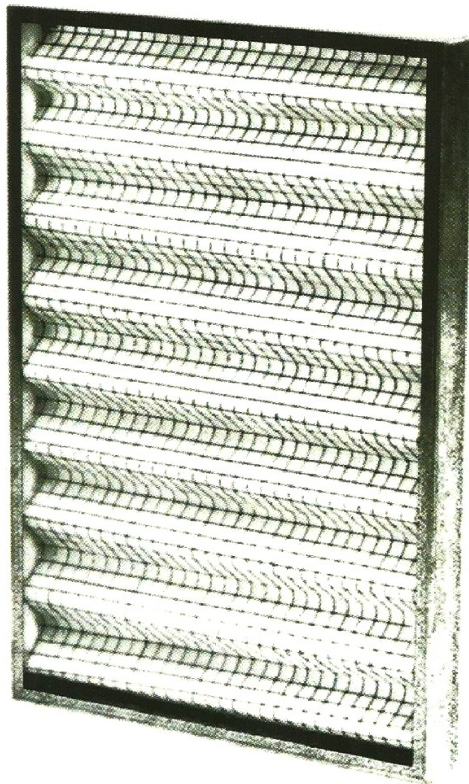

### FEATURES

High dust holding capacity, low resistance filters and it can be washed by air or regular water. This way less cost and longer filter service life. They are available in any size in the standard thickness of 25-50mm and in the v-type version with thickness of 25-50-75-100mm.

### CONSTRUCTION

POLY-WASH consists of high dust holding capacity synthetic media. It comes in two shapes v-type and panel type. Both types can be made out of Aluminum frame or Galvanized Steel frame. POLY-WASH is a heavy duty filter having supports in both sides square mesh metal.

